

# **LiFePO4 Battery Pack for 48V Off-grid System**

**Model : LFP200-48 48V200AH  
(10KWH)**

Product Specification

**MERITSUN**<sup>®</sup>  
**Lithium Energy Solution**

### 1. Scope (适用范围)

This specification is applied to the reference battery in this Specification .  
 本说明书适用于本书中所提及的电池。

### 2. Production (产品简介)

Product Name 产品名称: Lifepo4 Battery Pack 磷酸铁锂电池  
 Specification 型号: LFP200-48 48V 200Ah (10KWH)

### 3. Product Specification (产品技术规格)

Table 1 (表 1)

Package 电池组	No. (序号)	Item (项目)	General Parameter (常规参数)		Remark (备注)
	1	Combination method (组合方式)	15S		
	2	Rated Capacity (额定容量)	Typical (标称容量)	200Ah	Standard discharge after Standard charge (package) (标准充电后标准放电 (针对电池组))
			Minimum (最小容量)	200Ah	
	3	Factory Voltage (出厂电压)	49.5-50.5V		Mean Operation Voltage (即工作电压)
	4	Voltage at end of Discharge (放电终止电压)	40-42.5V		Discharge Cut-off Voltage (放电截止电压)
	5	Charging Voltage (充电电压)	53.2-54V		
	6	Internal Impedance (内阻)	≤50mΩ		Internal resistance measured at AC 1KHz after 50% charge (半电态下用交流法测量内阻) The measure must uses the new batteries that within one week after shipment and cycles less than 5 times (使用出货后不到一个星期及循环次数少于 5 次的新电池测量)
	7	Standard charge (标准充电)	Constant Current 20A Constant Voltage see No.5 0.01CA cut-off (持续电流: 20A 持续电压: 见序号 5 截止电流: 0.01CA)		Charge time : Approx 11h (充电时间: 大约 11 个小时)
8	Standard discharge (标准放电)	Constant current: 20A end voltage see NO.4 (持续电流: 20A 截止电压: 见序号 4)			
9	Maximum Continuous Charge Current (最大充电持续电流)	100A			

Continuous the table 1 (续 表 1)

	No. (序号)	Item (项目)	General Parameter (常规参数)	Remark (备注)
Package 电池组	10	Maximum Continuous Discharge Current (最大放电持续电 流)	100A	
	11	Operation Temperature Range (工作温度范围)	Charge (充电) : 0~45°C	60±25%R.H. Bare Cell (单体电池储存湿度范围)
			Discharge (放电) : -20~55°C	
	12	Storage Temperature Range (储存温度范围)	Less than 12 months : -10~35°C (小于 12 月: -10~35°C)	60±25%R.H. at the shipment state (出货状态时的湿度范围)
			less than 3 months: -10~45°C (小于 3 个月: -10~45°C)	
			Less than 7 day : -20~65°C (小于 7 天: -20~65°C)	
	13	Cycle life (循环寿命)	≥6000cycle	
	14	Dimensions (尺寸)	480*650*242 mm	Include case
	15	Weight (重量)	88kg	Include case
	16	Volumetric specific energy (体积比能量)	127WH/L	Include case
17	Gravimetric specific energy (质量比能量)	109WH/KG	Include case	

## 4. Battery Management System (电池管理系统)

### 4.1 BMS Specification (电池管理系统说明)

- The BMS is designed for 15/16 series lithium battery. (BMS 为 15/16 串锂离子电池设计)
- The BMS have all functions which are : (该 BMS 系统具有以下一些功能)
  - overcharge detection function (过充电保护功能)
  - over discharge detection function (过放电保护功能)
  - over current detection function (过电流保护功能)
  - short detection function (短路保护功能)
  - Temperature detection function 温度保护功能
  - balance function (均衡功能)
  - communicate function (通讯功能)
  - Alarm function (告警功能)

## 4.2 BMS Protect parameter (电池管理系统保护参数)

## 48V 15S 磷酸铁锂保护线路模块设定 Typical value specifications

Items	Details	Standard
Cell overcharge protection	Overcharge detection voltage	3.70±0.025V
	Overcharge detection delay time	Typical:1.0s
	Overcharge release voltage	3.45±0.02V
Cell over-discharge protection	Over-discharge detection voltage	2.75±0.02V
	Over-discharge detection delay time	Typical:1.0s
	Over-discharge release voltage	3.05±0.02V or charge release
Over-current protection	discharge Over-current protection current1	120±10A
	discharge Over-current detection delay time 1	1S
	discharge Over-current protection current2	150±10A
	discharge Over-current detection delay time2	≤100ms
	Charge OC protection current	120±10A
Short protection	Short protection current	350±10A
	Protection condition	Load short
	Detection delay time	≤800us
	Protection release condition	Charging release
Temperature(T) protection	Charge high T protection	65±2℃
	Charge high T recover	60±5℃
	Discharge high T protection	65±2℃
	Discharge high T recover	60±5℃
	Charge low T protection	-5±2℃
	Charge low T recover	0±2℃
	Discharge low T protection	-20±5℃
	Discharge low T recover	-15±5℃
Balance	Balance threshold voltage	3.45V
Communication	It has RS232 and RS485 standard communication interface, it can real-time monitoring the capacity of battery bank, the voltage, current, environment temperature, and charging/discharging current.	
Alarm	It has over-temperature, over charge, under-voltage, over-current, short circuit alarm function.	

5. Case Structure of Battery Pack (外观结构)




6. Application

Off-grid Energy System All In One Solution, House (Villa) Powerwall ESS



Lithium Battery Pack


Off-grid Inverter

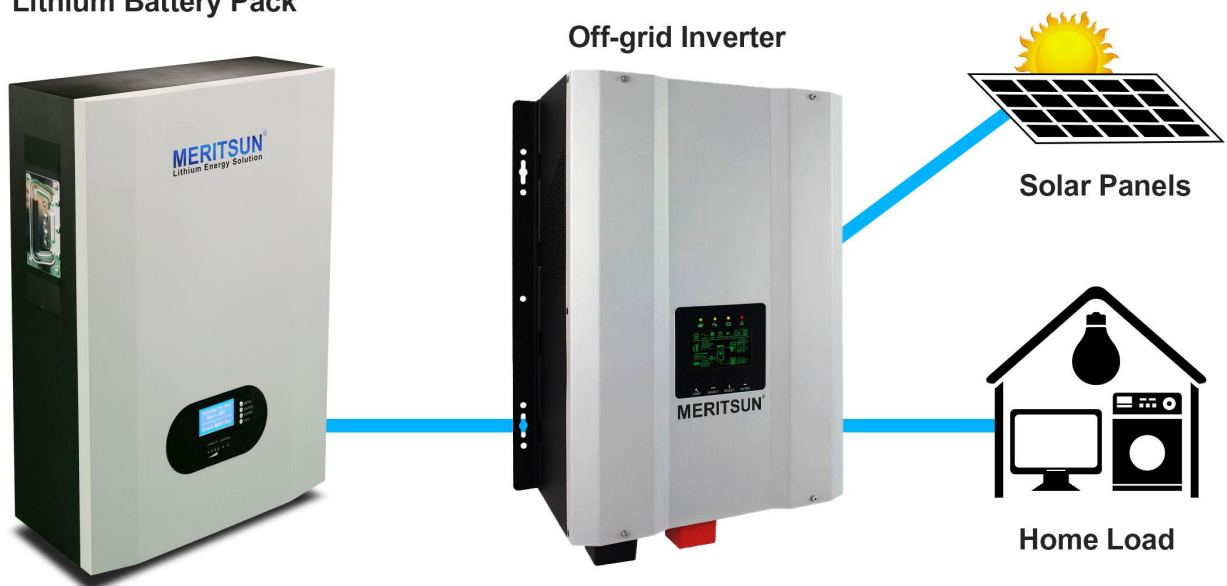

7. Appendix (特征曲线)

Discharge curve

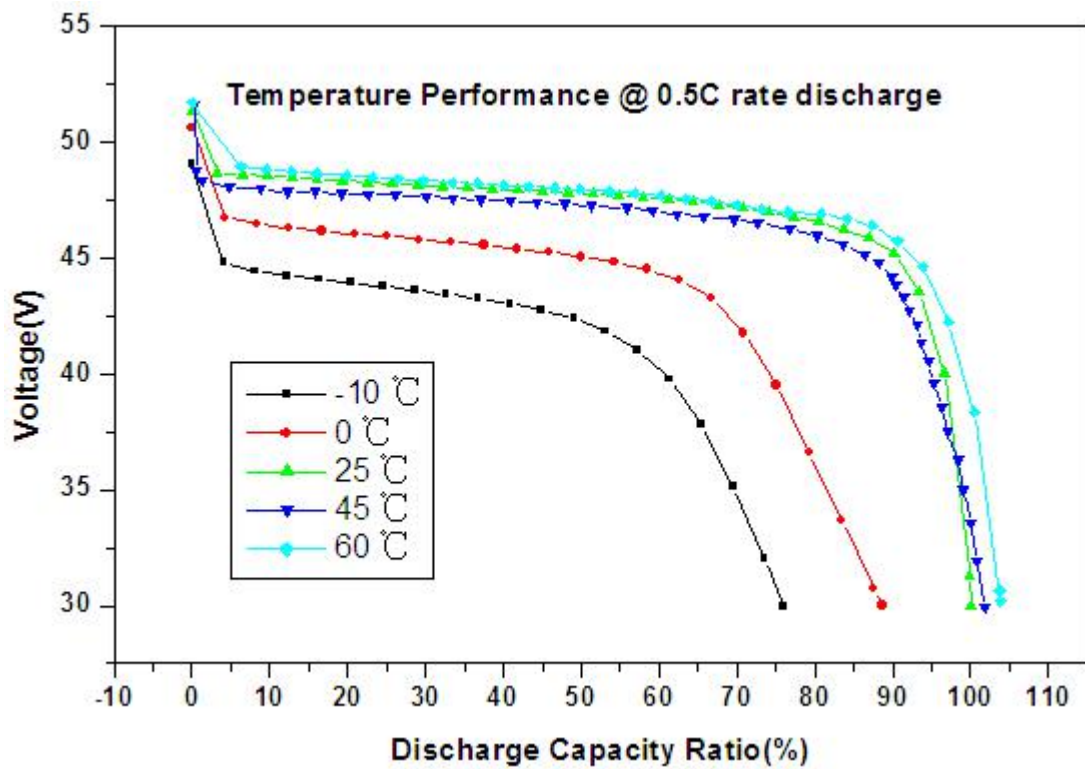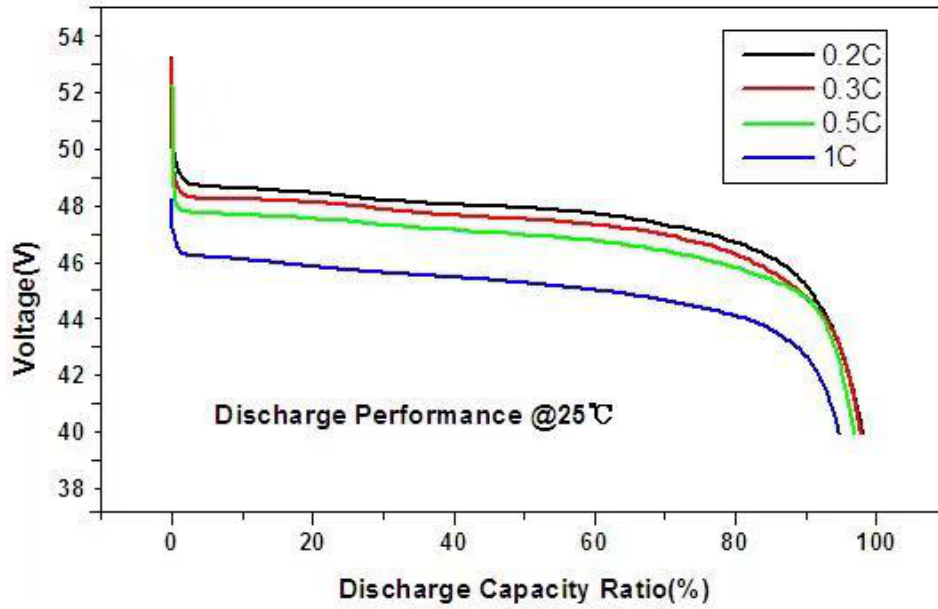

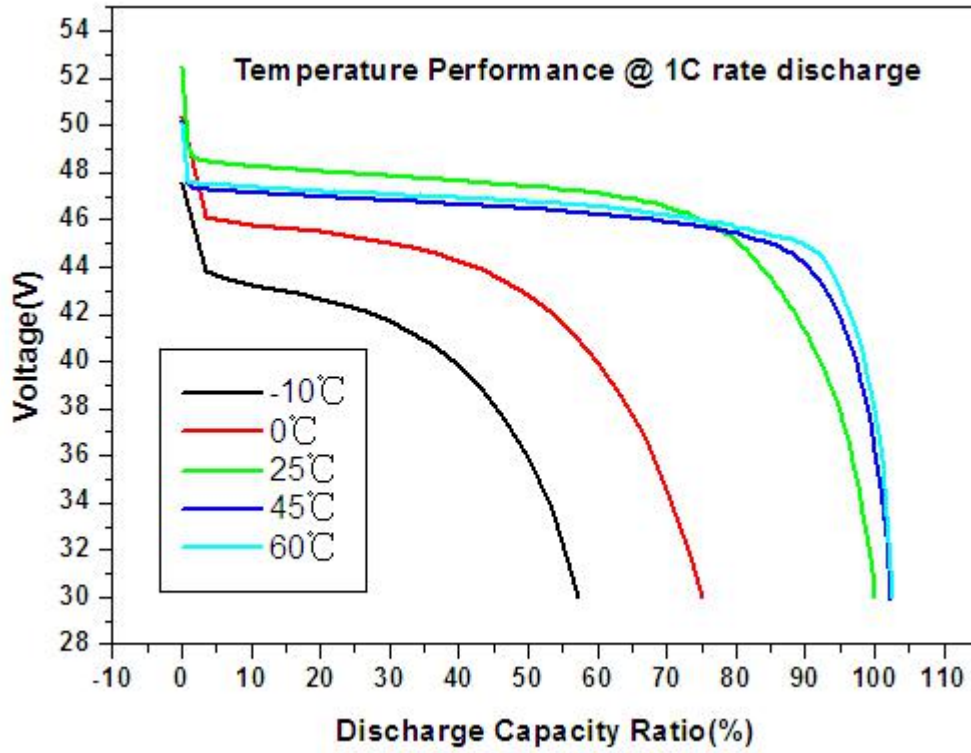

Charge curve

