


Microinverter

SUN-S130/160/180/200/220/225G4-EU-Q0

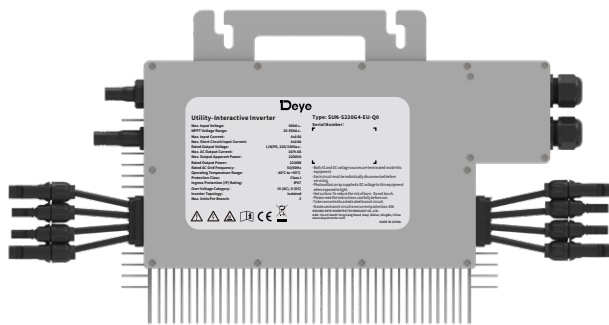

- ✓ 2 MPP trackers, module level monitoring
- ✓ IP67 protection degree
- ✓ Wi-Fi communication
- ✓ Rapid shutdown function
- ✓ Easy installation, suitable for quick-plug balcony PV system
- ✓ <100ms AC fast discharge, compliant with new required standard DIN VDE V 0126-95 (<200ms) to protect human safety
- ✓ Complete NS protection with self-check function
- ✓ External relay advantage with low temperature, long life, easier maintenance
- ✓ 25 years design lifetime and 10 years warranty
- ✓ With integrate Wi-Fi

Deye

Stock Code: 605117.SH

Model	SUN-S130G4 -EU-Q0	SUN-S160G4 -EU-Q0	SUN-S180G4 -EU-Q0	SUN-S200G4 -EU-Q0	SUN-S220G4 -EU-Q0	SUN-S225G4 -EU-Q0
PV String Input Data						
Max. PV Input Power (W)	210-460(4 Pieces)	210-560(4 Pieces)	210-630(4 Pieces)	210-700(4 Pieces)	210-770(4 Pieces)	210-790(4 Pieces)
Max. PV Input Voltage (V)	60					
Start-up Voltage (V)	20					
MPPT Voltage Range (V)	25-55					
Rated PV Input Voltage (V)	42.5					
Max. Operating PV Input Current (A)	16+16+16+16					
Max. Input Short Circuit Current (A)	24+24+24+24					
No. of MPP Trackers/ No. of Strings MPP Tracker	2/2+2					
AC Output Side						
Rated AC Output Active Power (W)	1300	1600	1800	2000	2200	2250
Max. AC Output Apparent Power (VA)	1300	1600	1800	2000	2200	2250
Rated AC Output Current (A)	6.0/5.7	7.3/7	8.2/7.9	9.1/8.7	10/9.6	10.3/9.8
Max. AC Output Current (A)	6.0/5.7	7.3/7	8.2/7.9	9.1/8.7	10/9.6	10.3/9.8
Rated Output Voltage/Range (V)	220/230 0.85Un-1.1Un					
Grid Connection Form	L/N/PE					
Rated Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65					
Max. Unit per Branch	5	4	3	3	3	3
Power Factor Adjustment Range	0.9 leading-0.9 lagging/0.95 leading-0.95lagging					
Total Current Harmonic Distortion THDi	<3%					
DC Injection Current	<0.5%In					
Efficiency						
Max. Efficiency	96.5%					
Euro Efficiency	96.0%					
MPPT Efficiency	>99%					
Equipment Protection						
DC Reverse Polarity Protection	Yes					
AC Output Overcurrent Protection	Yes					
AC Output Overvoltage Protection	Yes					
AC Output Short Circuit Protection	Yes					
Thermal Protection	Yes					
Insulation Impedance Detection	Yes					
Anti-islanding Protection	Yes					
Surge Protection Level	TYPE II(AC)					
Interface						
Communication Interface	Wi-Fi					
General Data						
Operating Temperature Range (°C)	-40 to +65°C, >45°C Derating					
Permissible Ambient Humidity	0-100%					
Permissible Altitude (m)	2000m					
Noise (dB)	≤25					
Ingress Protection(IP) Rating	IP 67					
Inverter Topology	Isolated					
Over Voltage Category	OVC II(DC), OVC III(AC)					
Cabinet Size (WxHxD mm)	366×236×38 (Excluding Connectors and Brackets)					
Weight (kg)	4.66					
Warranty	10 Years					
Type of Cooling	Natural Cooling					
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G98, VDE-AR-N 4105					
Safety EMC/Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					